

Use offense to inform defense.  
Find flaws before the bad guys do.

Copyright SANS Institute  
Author Retains Full Rights

This paper is from the SANS Penetration Testing site. Reposting is not permitted without express written permission.

Interested in learning more?

Check out the list of upcoming events offering  
"Web App Penetration Testing and Ethical Hacking (SEC542)"  
at <https://pen-testing.sans.org/events/>

# Winquisitor: Windows Information Gathering Tool

*GIAC (GCIH) Gold Certification*

Author: Mike Cardosa, mcardosa@gmail.com

Advisor: Rick Wanner

Accepted: TBD

## Abstract

*Gathering and reviewing information from multiple systems in a timely manner is a critical function for Windows administrators. This information allows administrators to respond to threats in order to minimize risks to their environments. Winquisitor is a tool that facilitates the timely retrieval of information from multiple Windows systems enabling the administrator to respond in an appropriate amount of time. Unlike other command line tools, Winquisitor allows multiple types of queries in a single command with several output formats. This saves the administrator the time it would take to combine the results from multiple command line tools into a usable and actionable format.*

## 1. Introduction

Administrators who manage Microsoft Windows computers on their networks need to gather information from these systems in order to ensure that they are operating smoothly and securely. Some of the required information includes:

- Patch levels
- Possible virus infections
- Registry settings and values
- Local users and groups
- The state of processes and services

While most administrators are capable of querying this information using Windows GUI tools, it is an approach that does not scale easily to more than a few individual systems. Administrators can leverage command-line tools to extract the information, but in many instances, these tools are not well known or documented. Furthermore, it is often difficult to combine the output from multiple tools or queries without manually editing files or scripting an entire solution. As a result, IT organizations often maintain a collection of disparate scripts and Excel files that must be manually updated.

Many IT organizations do not have the necessary time or resources to develop a custom scripting solution. They are therefore required to buy a commercial tool or collect data on a less timely basis, which increases risk. Winquisitor is an attempt to streamline the data collection process so that administrators can react and deal with potential issues in a more appropriate timeframe.

## 2. Existing Tools

Microsoft provides a number of tools that enable administrators to query information from both the local and remote Windows computers. These include WMI, sc, the net commands, and the reg commands. While these tools are extremely useful, there are

Mike Cardosa

many for an administrator to be aware of and it is not easy to combine the output from multiple tools. It is also not easy to construct a single command that will execute multiple types of tests against multiple target systems. Winquisitor is an attempt to solve this problem.

### 3. Design Considerations

The solution was designed to meet the following requirements:


- Compatible with the majority of current and planned Windows operating system versions including:
  - Windows 2000
  - Windows XP
  - Windows 2003
  - Windows Vista
  - Windows 7
  - Windows 2008
- No additional software to install other than the tool itself
- No need to compile source code
- Able to run queries against one or more Windows computers
- Able to simultaneously run multiple types of queries
- Support multiple output formats (CSV and XML)
- Allow the user to run a custom query that the tool's author had not considered

Given the above requirements, a script written using VBScript seemed to be the most appropriate format for the solution. Although Microsoft is currently encouraging the adoption of PowerShell, only recent versions of Windows have PowerShell installed by default. VBScript, on the other hand, is compatible with the widest range of Windows versions and Microsoft is not planning to discontinue support for it anytime soon. (Ed Wilson and Craig Liebendorfer, 2009)

Mike Cardoso

## 4. Functionality Overview

Winquisitor consists of a single VBScript file, `winquisitor.vbs`. Additionally, there is an optional XSL file, `winquisitor.xsl`, which can be used to view an XML-formatted output file in a web browser. Winquisitor can be run on any modern Windows system using `cscript.exe` as the script host.

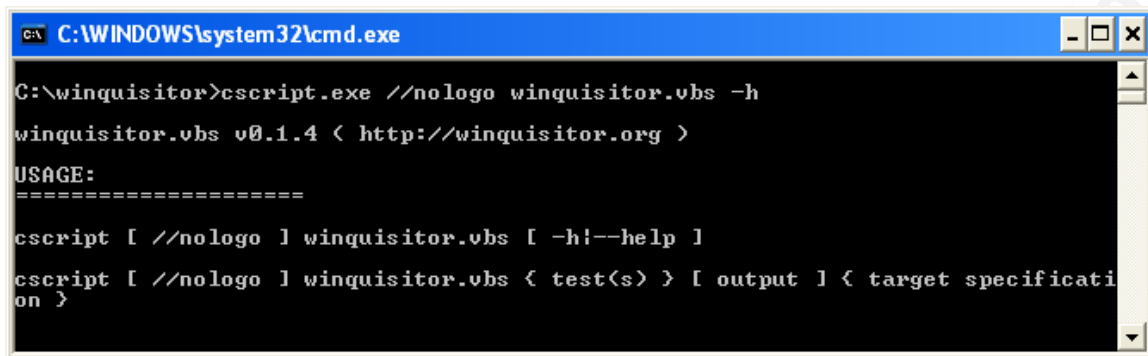

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript.exe //nologo winquisitor.vbs -h
winquisitor.vbs v0.1.4 < http://winquisitor.org >
USAGE:
=====
cscript [ //nologo ] winquisitor.vbs [ -h|--help ]
cscript [ //nologo ] winquisitor.vbs < test(s) > [ output ] < target specificati
on >
  
```

The following sections will highlight Winquisitor's functions and primary arguments. All of Winquisitor's options and arguments can be found in the `README.txt` file included in the Appendix or downloaded from <http://www.winquisitor.org>.

### 4.1. Specifying Target Machines

Winquisitor's strength lies in its ability to run multiple tests against multiple target systems. There are several command line arguments that are used to specify target systems.

#### **Target (-t, --target)**

Specifies an individual target. This could be in the form of a hostname or an IP address. A user can supply multiple target specifications to the script.

#### **Target file (-T, --target-file)**

Rather than specify target hosts individually on the command line, the user can instead supply a text file that contains the names of all the target hosts. The file should contain one host per line.

Mike Cardosa


**Username (-u, --username)**

By default, Winquisitor runs with the credentials of the user running the script. The user can provide an alternate username to Winquisitor that will be used to authenticate to each of the target systems. This can be either a local or a domain account.

**Password (-p, --password)**

If the user specifies an alternate username, a password must also be supplied to the script. There are two methods for providing the password. If the user wishes, the password can be given on the command line in the format: **-p:"password123"**.

If the user prefers not to specify the password on the command line as an argument, Winquisitor will prompt for the password interactively at runtime. Winquisitor uses the ScriptPW.Password object (Microsoft Corporation, 2004) to mask the password as it is typed. However, ScriptPW.Password is only available on Windows 2003 and Windows XP systems. (Microsoft Corporation, 2008) On non-XP/2003 systems, there is no way to mask the password. A warning message is presented to the user if the password cannot be masked.

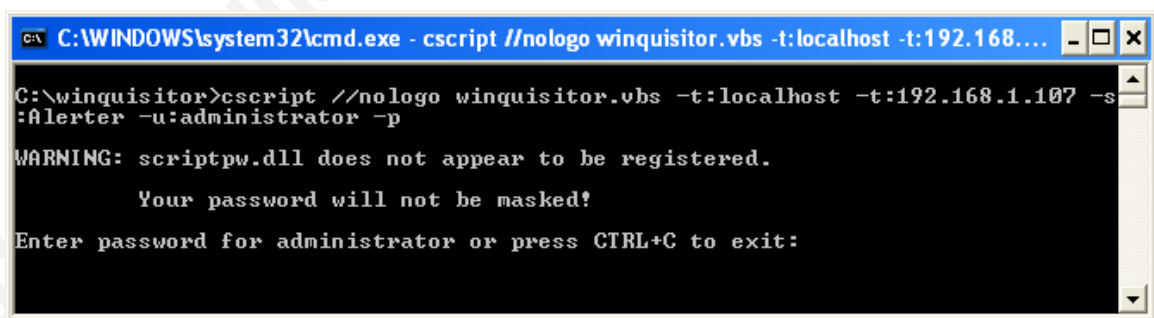

```

C:\WINDOWS\system32\cmd.exe - cscript //nologo winquisitor.vbs -t:localhost -t:192.168...
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -t:192.168.1.107 -s
:Alerter -u:administrator -p
WARNING: scriptpw.dll does not appear to be registered.
        Your password will not be masked!
Enter password for administrator or press CTRL+C to exit:
  
```


Warning message alerting the user that there is no way to mask their password

## 4.2. Specifying Tests and Queries

Winquisitor provides an easy way to run multiple types of tests against target systems. A user can run any number or combination of the following tests against an arbitrary number of target systems.

### File test (-f, --file)

Test for the existence of a file on a target system. If the file is found, the file version information is also retrieved. Winquisitor queries the CIM\_Datafile class (Microsoft Corporation) for this information.

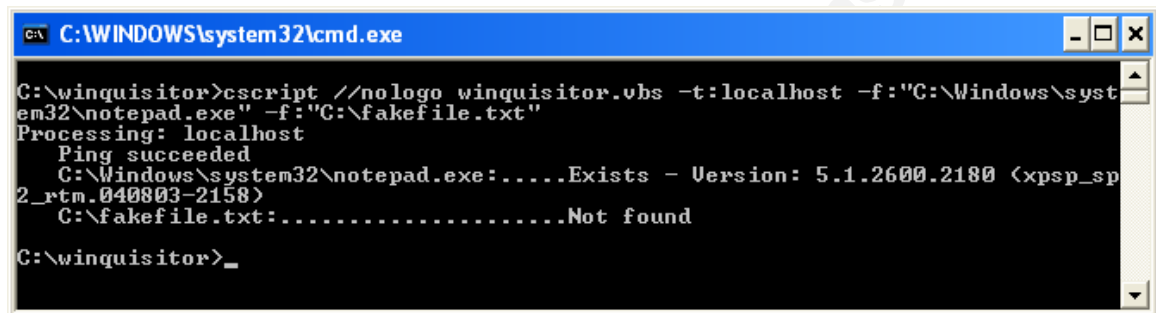


```
C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -f:"C:\Windows\system32\notepad.exe" -f:"C:\fakefile.txt"
Processing: localhost
Ping succeeded
C:\Windows\system32\notepad.exe:.....Exists - Version: 5.1.2600.2180 (xpsp_sp2_rtm.040803-2158)
C:\fakefile.txt:.....Not found
C:\winquisitor>_
```

Example of file tests

### Service test (-s, --service)

Test for the state of a given service on a target system. Winquisitor queries the Win32\_Service class (Microsoft Corporation) for this information.

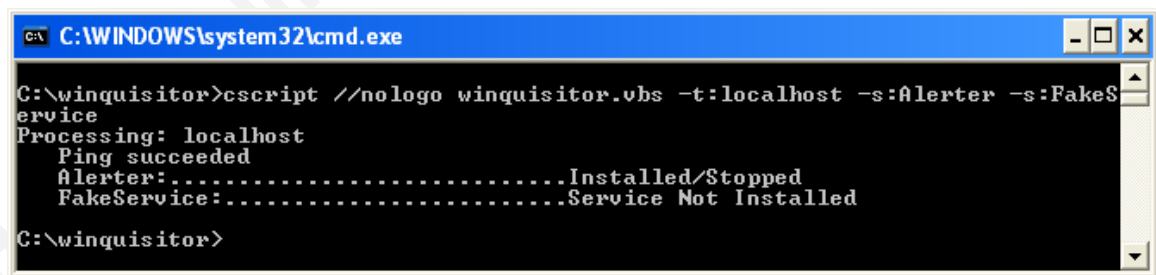


```
C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -s:Alerter -s:FakeService
Processing: localhost
Ping succeeded
Alerter:.....Installed/Stopped
FakeService:.....Service Not Installed
C:\winquisitor>
```

Example of service tests

### Patch/Update test (-pa, --patch)

Test whether or not a given patch/update has been installed on a target system.

Winquisitor queries the Win32\_QuickFixEngineering class (Microsoft Corporation) for this information.<sup>1</sup>

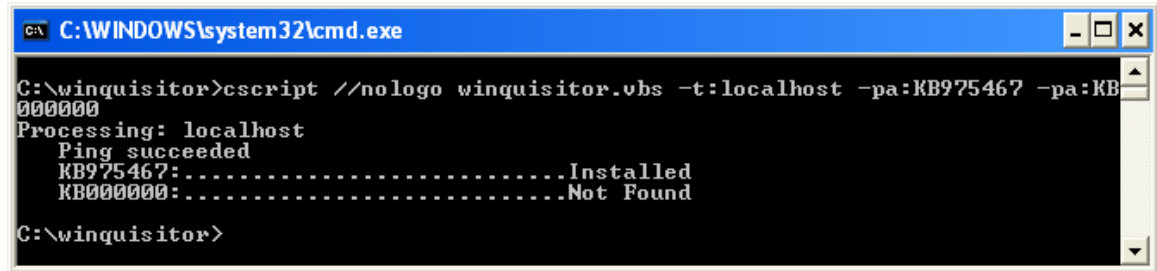

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -pa:KB975467 -pa:KB000000
Processing: localhost
Ping succeeded
KB975467: .....Installed
KB000000: .....Not Found
C:\winquisitor>


```

Example of patch tests

### Process test (-pr, --process)

Test whether or not a given process is currently running on a target system.

Winquisitor queries the Win32\_Process class (Microsoft Corporation) for this information.

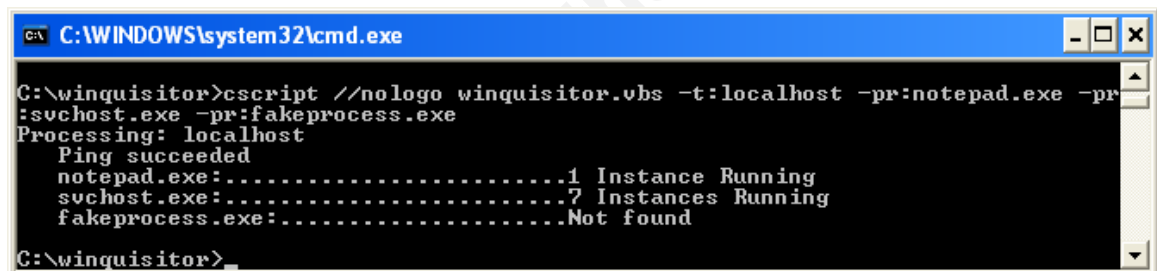

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -pr:notepad.exe -pr:suchost.exe -pr:fakeprocess.exe
Processing: localhost
Ping succeeded
notepad.exe: .....1 Instance Running
suchost.exe: .....7 Instances Running
fakeprocess.exe: .....Not found
C:\winquisitor>

```

Example of process tests

### Registry key test (-rk, --registry-key)

Test whether or not a given registry key exists on a target system. Winquisitor queries the StdRegProv class (Microsoft Corporation) for this information.

<sup>1</sup> Starting with Windows Vista, the Win32\_QuickFixEngineering Class “returns only the updates supplied by Component Based Servicing (CBS).” (Microsoft Corporation) The next version of Winquisitor will supplement the information with that retrieved from the Windows Update Agent API (Microsoft Corporation, 2009) to return accurate results.



```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -rk:"HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion" -rk:"HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run" -rk:HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\PrevVersion"
Processing: localhost
Ping succeeded
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion:
.....Exists
HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\Run:
.....Exists
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\PrevVersion:
.....Not found
C:\winquisitor>_

```

Example of registry key tests

### Registry value test (-rv, --registry-value)

Retrieve the value of a given registry key if it exists on a target system. Winquisitor queries the StdRegProv class (Microsoft Corporation) for this information.

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -rv:"HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\DateTime\Servers\1" -rv:"HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\DateTime\Servers\2" -rv:"HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\DateTime\Servers\3"
Processing: localhost
Ping succeeded
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\DateTime\Servers\1:
.....<REG_SZ> = time.windows.com
HKLM\SOFTWARE\Microsoft\Windows\CurrentVersion\DateTime\Servers\2:
.....<REG_SZ> = time.nist.gov
HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\DateTime\Servers\3:
.....Registry Key Not found
C:\winquisitor>_

```

Example of registry value tests

### Local user test (-lu, --local-user)

Test for the existence of a local user on a target system. Winquisitor queries the Win32\_UserAccount class (Microsoft Corporation) for this information.

```


C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -lu:administrator -lu:johnny
Processing: localhost
Ping succeeded
administrator:.....Exists
johnny:.....Not Found
C:\winquisitor>

```

Example of local user tests

### Local group test (-lg, --local-group)

Test for the existence of a local group. If the local group exists, enumerate all members. Winquisitor uses the Group object of the WinNT provider (Microsoft Corporation, 2009) to retrieve this information.

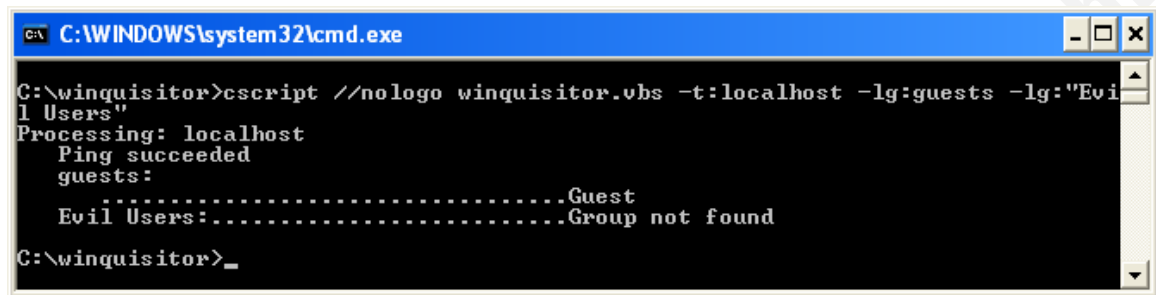

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -lg:guests -lg:"Evil
Users"
Processing: localhost
Ping succeeded
guests:
.....Guest
Evil Users:.....Group not found
C:\winquisitor>_


```

Example of local group tests

### Custom query (-cq, --custom-query)

One of the most powerful features of Winquisitor is the ability to specify one or more custom queries to retrieve information from the **root\cimv2** namespace. This allows the user to gather information that might not already be included in Winquisitor's functionality. For example, this could be used to retrieve hardware or custom settings information.

By default, Winquisitor will provide the number of records that the custom query returned.

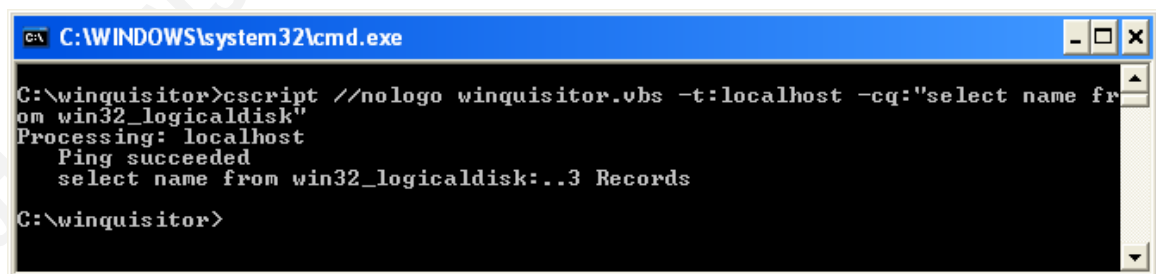


```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -cq:"select name fr
om win32_logicaldisk"
Processing: localhost
Ping succeeded
select name from win32_logicaldisk:..3 Records
C:\winquisitor>

```

Example of a custom query with summarized results

If the user would like to receive detailed query results, he/she may provide the **--result-detail** argument to Winquisitor.

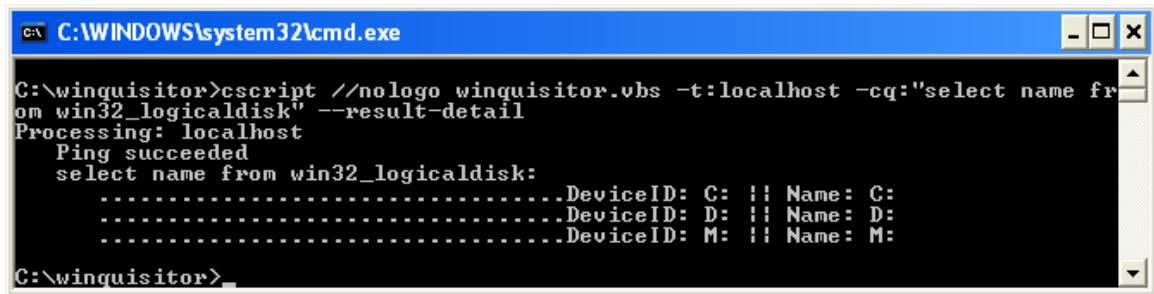

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -cq:"select name fr
om win32_logicaldisk" --result-detail
Processing: localhost
Ping succeeded
select name from win32_logicaldisk:
.....DeviceID: C: || Name: C:
.....DeviceID: D: || Name: D:
.....DeviceID: M: || Name: M:
C:\winquisitor>_

```


Example of a custom query with detailed results

### 4.3. Output Formats

In addition to the default output on standard out, Winquisitor provides two other output formats: CSV and XML. These formats not only supply an easy way for a user to visualize the results in a spreadsheet or browser but also give the user the option of parsing the results programmatically if needed.

For example, the user can have the below Winquisitor command result in any of the following formats.

#### Winquisitor command

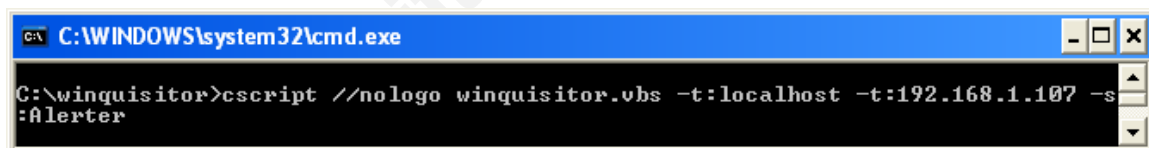


```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -t:192.168.1.107 -s
:alerter

```

#### Default output

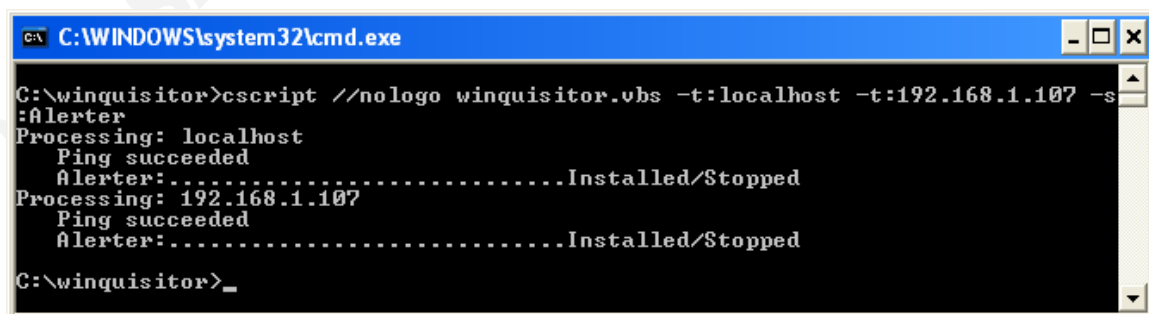

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:localhost -t:192.168.1.107 -s
:alerter
Processing: localhost
Ping succeeded
Alerter:.....Installed/Stopped
Processing: 192.168.1.107
Ping succeeded
Alerter:.....Installed/Stopped
C:\winquisitor>_

```

#### CSV output (viewed as a spreadsheet)

Mike Cardosa

Computer	Connection	TestType	Parameter	Result
localhost	Success	Service	Alerter	Installed/Stopped
192.168.1.107	Success	Service	Alerter	Installed/Stopped

### XML output (unformatted)

```

- <winquisitor_audit>
  - <scan>
    - <scan_info>
      winquisitor.vbs -t:localhost -t:192.168.1.107 -s:Alerter -oX:results.xml
    </scan_info>
    <start_date>1/9/2010</start_date>
    <start_time>2:11:40 PM</start_time>
    - <target>
      <computer>localhost</computer>
      <connection>Success</connection>
      - <test>
        <type>Service</type>
        <value>Alerter</value>
        <result>Installed/Stopped</result>
      </test>
    </target>
    - <target>
      <computer>192.168.1.107</computer>
      <connection>Success</connection>
      - <test>
        <type>Service</type>
        <value>Alerter</value>
        <result>Installed/Stopped</result>
      </test>
    </target>
    <end_date>1/9/2010</end_date>
    <end_time>2:11:41 PM</end_time>
  </scan>
</winquisitor_audit>

```

### XML output (formatted with the default winquisitor.xsl file)<sup>2</sup>

---

<sup>2</sup> The user may specify an alternate XSL file in order to customize the display format.

## Winquisitor Results


<b>Scan</b>	winquisitor.vbs -t:localhost -t:192.168.1.107 -s:Alerter -oX:results.xml
<b>Started</b>	2:15:22 PM on 1/9/2010
<b>Ended</b>	2:15:22 PM on 1/9/2010

Computer	Test type	Parameter	Result
192.168.1.107			
	Service	Alerter	Installed/Stopped
localhost			
	Service	Alerter	Installed/Stopped

## 5. Putting It All Together: Trojan.Bredolab Example

Testing for the existence of a virus or trojan on a target system is a common Winquisitor use case. For example, an IDS might generate an alert that a certain system is exhibiting symptoms of the Bredolab Trojan. Symantec's description of this malware includes specific technical details of an infection. (Symantec Corporation, 2009) An administrator can leverage this information to confirm the existence of the Trojan on the identified system as well as proactively scan the other systems that he/she manages for signs of infection.

The following command would accomplish this task and present the results in an XML format suitable for printing.

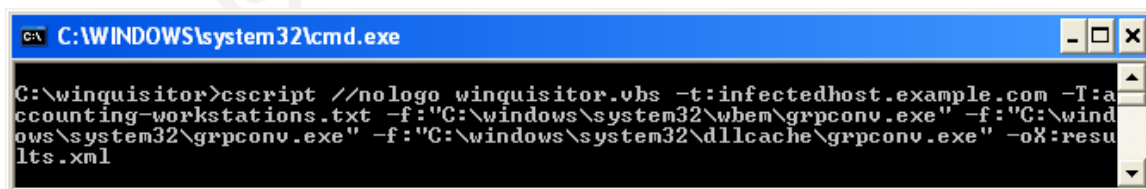

```

C:\WINDOWS\system32\cmd.exe
C:\winquisitor>cscript //nologo winquisitor.vbs -t:infectedhost.example.com -T:accounting-workstations.txt -f:"C:\windows\system32\wbem\grpconv.exe" -f:"C:\windows\system32\grpconv.exe" -f:"C:\windows\system32\dlcache\grpconv.exe" -oX:results.xml

```

## 6. Future Enhancements

There are several planned updates to Winquisitor:

Mike Cardosa

1. **Configuration file** – Command line arguments are extremely useful for scripts, but they can become tedious when the script must be run multiple times with similar arguments. The option to create a configuration file containing all of the arguments to the script would be more convenient in these situations.
2. **Searching with regular expressions** – There are some instances where the file name might not be known. For example, a virus or worm might create the file “C:\Windows\system32\[7 random numbers].exe”. The ability to search for the file using a regular expression would locate this file if it existed, while the current iteration of Winquisitor could not.
3. **Support for multiple threads** – Although Winquisitor can save administrators a large amount of time over gathering information manually, the script does take several seconds to scan a single computer. Since it will only scan one system at a time, those seconds can add up when scanning an entire network. While it is possible for an administrator to manually start Winquisitor multiple times with different targets, the capability to scan multiple systems in parallel would simplify this process.

## 7. Conclusion

Although Winquisitor originated as a GCIH Gold Certification Project, it will continue as a supported tool for Windows administrators. The hope is that these administrators can save time by leveraging an existing tool to retrieve information from their systems rather than developing custom scripts. However, if script development does make more sense in certain situations, script developers could leverage the classes and methods used by Winquisitor as starting points for their scripts.

Winquisitor is available for download at <http://www.winquisitor.org>.

## 8. Appendix

### 8.1. Winquisitor README.txt

winquisitor.vbs v0.1.4 ( <http://winquisitor.org> )

#### DESCRIPTION:

=====

Winquisitor aims to simplify the tasks that Windows administrators must perform by providing a simple way to gather information from a number of Windows systems, reducing custom script development.

#### DISCLAIMER:

=====

The author makes no representations about the suitability of this software for any purpose. This software is provided AS IS and without any express or implied warranties, including, without limitation, the implied warranties of merchantability and fitness for a particular purpose. The entire risk arising out of the use or performance of this script and documentation remains with you. In no event shall the author, or anyone else involved in the creation, production, or delivery of the scripts be liable for any damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or other pecuniary loss) arising out of the use of or inability to use the script or documentation, even if the author has been advised of the possibility of such damages.

#### INSTALLATION:

=====

Simply extract winquisitor.vbs to any local directory.

If you wish to view XML in a browser formatted using the included winquisitor.xsl, copy winquisitor.xsl to the report directory or specify the path to the XSL file on the command line with the -xsl option.

Mike Cardosa

## USAGE:

```
=====  
cscript [ //nologo ] winquisitor.vbs [ -h|--help ]
```

```
cscript [ //nologo ] winquisitor.vbs { test(s) } [ output ] { target specification }
```

## PARAMETERS:

### OUTPUT:

```
-----  
-h,--help          Display this usage screen  
-v                 Enable verbose output  
-vv               Enable very verbose output  
-d,--debug        Enable debugging output  
-q,--quiet        Suppress output  
-oC:file          Output CSV results to the given file  
-oX:file          Output XML results to the given file  
-xsl:file         Reference the given XSL document in the  
                  XML output file instead of the default  
                  winquisitor.xsl  
--web-xsl         Reference the XSL file hosted on winquisitor.org  
                  in the XML output file instead of the  
                  default winquisitor.xsl  
--append-output   Append to the given output file instead of  
                  overwriting
```

### TARGET SPECIFICATION:

```
-----  
-t,--target:computer Add the given computer to the list of computers  
                    to test  
-T,--target-file:file Read targets from the given file  
                    (one target per line)  
-np,--no-ping       Do not ping targets before trying to connect  
-u,--username:username Connect to targets with the given username  
-p,--password:password Connect to targets with the given password  
                    If a username was given and a password was  
                    not specified, then the user will be prompted  
                    for a password.
```

### TESTS:

```
-----  
-f,--file:file     Test the existence and version of the given file
```

Mike Cardosa



-s,--service:service      Test the state of the given service  
 -pa,--patch:patch        Test whether a given patch has been applied  
 -pr,--process:process     Test whether or not a process is running  
 -rk,--registry-key:key    Test the existence and/or value of the  
                             given registry key  
 -rv,--regisry-value:value  Test the given registry value  
 -lu,--local-user:username  Test the existence of the given user  
 -lg,--local-group:groupname Enumerate the members of the given local group  
 -cq,--custom-query:query   WMI query against the CIMV2 namespace  
 --result-detail            When used with -cq, detailed query results  
                             are provided instead of a summary

#### EXAMPLES:

=====

#### EXAMPLE 1:

-----

Test for the Alerter service on machines 192.168.1.10 and 192.168.1.11 and record results in XML format to results.xml

```
winquisitor.vbs -t:192.168.1.10 -t:192.168.1.11 -s:Alerter -oX:results.xml
```

#### EXAMPLE 2:

-----

Test for the existence of the file "C:\Windows\system32\evil.exe" and the running process trojan.exe against 192.168.1.10, 192.168.1.1, and all hosts listed in targets.txt. Record results in XML format to results.xml

```
winquisitor.vbs -t:192.168.1.10 -t:192.168.1.11 -T:targets.txt
-f:"C:\Windows\system32\evil.exe" -p:"trojan.exe" -oX:results.xml
```

#### EXAMPLE 3:

-----

Check for patch KB890046 and run a custom query against 192.168.1.11 displaying detailed results. Do not ping the target first. Append the results in CSV format to results.csv

```
winquisitor.vbs -t:192.168.1.11 -np -pa:KB890046 -oC:results.csv
-cq:"select caption from win32_useraccount" --result-detail --append-output
```

## 9. Works Cited

Ed Wilson and Craig Liebendorfer, S. G. (2009, March 4). *Hey, Scripting Guy! How Do I Migrate My VBScript WMI Queries to Windows PowerShell?* Retrieved January 5, 2010, from Hey, Scripting Guy! Blog:

<http://blogs.technet.com/heyscriptingguy/archive/2009/03/04/how-do-i-migrate-my-vbscript-wmi-queries-to-windows-powershell.aspx>

Microsoft Corporation. (2008). *2008 Winter Scripting Games Tip of the Week: Working With User Input*. Retrieved January 3, 2010, from Microsoft TechNet:

<http://www.microsoft.com/technet/scriptcenter/funzone/games/tips08/gtip0208.mspx>

Microsoft Corporation. (2009, November 12). *ADSI Objects of WinNT (Windows)*.

Retrieved January 8, 2010, from MSDN Windows Developer Center:

<http://msdn.microsoft.com/en-us/library/aa772211%28VS.85%29.aspx>

Microsoft Corporation. (n.d.). *CIM\_Datafile Class (Windows)*. Retrieved January 3,

2010, from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa387236%28VS.85%29.aspx>

Microsoft Corporation. (2004, February 12). *Masking Passwords in XP and Windows*

*2003*. Retrieved January 3, 2010, from The Scripting Guys' First Blog:

<http://blogs.msdn.com/gstemp/archive/2004/02/12/71903.aspx>

Microsoft Corporation. (n.d.). *StdRegProv Class (Windows)*. Retrieved January 8, 2010,

from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa393664%28VS.85%29.aspx>

Microsoft Corporation. (n.d.). *Win32\_Process Class (Windows)*. Retrieved January 8, 2010, from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa394372%28VS.85%29.aspx>

Microsoft Corporation. (n.d.). *Win32\_QuickFixEngineering Class (Windows)*. Retrieved January 9, 2010, from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa394391%28VS.85%29.aspx>

Microsoft Corporation. (n.d.). *Win32\_Service Class (Windows)*. Retrieved January 9, 2010, from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa394418%28VS.85%29.aspx>

Microsoft Corporation. (n.d.). *Win32\_UserAccount Class (Windows)*. Retrieved January 8, 2010, from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa394507%28VS.85%29.aspx>

Microsoft Corporation. (2009, November 18). *Windows Update Agent API (Windows)*. Retrieved January 9, 2010, from MSDN Windows Developer Center: <http://msdn.microsoft.com/en-us/library/aa387099%28VS.85%29.aspx>

Symantec Corporation. (2009, May 29). *Trojan.Bredolab Technical Details*. Retrieved January 8, 2010, from Symantec: [http://www.symantec.com/security\\_response/writeup.jsp?docid=2009-052907-2436-99&tabid=2](http://www.symantec.com/security_response/writeup.jsp?docid=2009-052907-2436-99&tabid=2)

# Upcoming SANS Penetration Testing



Click Here to  
**{Get Registered!}**



SANS Austin 2018	Austin, TX	Nov 26, 2018 - Dec 01, 2018	Live Event
Austin 2018 - SEC504: Hacker Tools, Techniques, Exploits, and Incident Handling	Austin, TX	Nov 26, 2018 - Dec 01, 2018	vLive
SANS San Francisco Fall 2018	San Francisco, CA	Nov 26, 2018 - Dec 01, 2018	Live Event
SANS Stockholm 2018	Stockholm, Sweden	Nov 26, 2018 - Dec 01, 2018	Live Event
Mentor Session AW - SEC560	Colorado Springs, CO	Nov 28, 2018 - Dec 07, 2018	Mentor
SANS Dublin 2018	Dublin, Ireland	Dec 03, 2018 - Dec 08, 2018	Live Event
SANS Nashville 2018	Nashville, TN	Dec 03, 2018 - Dec 08, 2018	Live Event
SANS Santa Monica 2018	Santa Monica, CA	Dec 03, 2018 - Dec 08, 2018	Live Event
Mentor Session AW - SEC504	St. Petersburg, FL	Dec 05, 2018 - Dec 14, 2018	Mentor
SANS Frankfurt 2018	Frankfurt, Germany	Dec 10, 2018 - Dec 15, 2018	Live Event
Community SANS Tampa SEC560	Tampa, FL	Dec 10, 2018 - Dec 15, 2018	Community SANS
SANS Cyber Defense Initiative 2018	Washington, DC	Dec 11, 2018 - Dec 18, 2018	Live Event
Mentor Session AW - SEC542	Oklahoma City, OK	Dec 12, 2018 - Jan 25, 2019	Mentor
Cyber Defense Initiative 2018 - SEC504: Hacker Tools, Techniques, Exploits, and Incident Handling	Washington, DC	Dec 13, 2018 - Dec 18, 2018	vLive
Cyber Defense Initiative 2018 - SEC560: Network Penetration Testing and Ethical Hacking	Washington, DC	Dec 13, 2018 - Dec 18, 2018	vLive
Mentor Session AW - SEC504	Hong Kong, China	Dec 22, 2018 - Jan 26, 2019	Mentor
SANS Bangalore January 2019	Bangalore, India	Jan 07, 2019 - Jan 19, 2019	Live Event
SANS vLive - SEC504: Hacker Tools, Techniques, Exploits, and Incident Handling	SEC504 - 201901,	Jan 08, 2019 - Feb 14, 2019	vLive
Mentor Session - SEC542	Denver, CO	Jan 10, 2019 - Mar 14, 2019	Mentor
SANS Amsterdam January 2019	Amsterdam, Netherlands	Jan 14, 2019 - Jan 19, 2019	Live Event
SANS Sonoma 2019	Santa Rosa, CA	Jan 14, 2019 - Jan 19, 2019	Live Event
SANS Threat Hunting London 2019	London, United Kingdom	Jan 14, 2019 - Jan 19, 2019	Live Event
Sonoma 2019 - SEC504: Hacker Tools, Techniques, Exploits, and Incident Handling	Santa Rosa, CA	Jan 14, 2019 - Jan 19, 2019	vLive
Cyber Threat Intelligence Summit & Training 2019	Arlington, VA	Jan 21, 2019 - Jan 28, 2019	Live Event
SANS Miami 2019	Miami, FL	Jan 21, 2019 - Jan 26, 2019	Live Event
SANS Las Vegas 2019	Las Vegas, NV	Jan 28, 2019 - Feb 02, 2019	Live Event
SANS Security East 2019	New Orleans, LA	Feb 02, 2019 - Feb 09, 2019	Live Event
Security East 2019 - SEC542: Web App Penetration Testing and Ethical Hacking	New Orleans, LA	Feb 04, 2019 - Feb 09, 2019	vLive
Community SANS Minneapolis SEC504	Minneapolis, MN	Feb 04, 2019 - Feb 09, 2019	Community SANS
Security East 2019 - SEC504: Hacker Tools, Techniques, Exploits, and Incident Handling	New Orleans, LA	Feb 04, 2019 - Feb 09, 2019	vLive
Mentor Session - SEC560	Fredericksburg, VA	Feb 06, 2019 - Mar 20, 2019	Mentor